

DESIGN

Urban efficiency, intelligent design

VS2 CITI combines a **modern, minimalist design** with the practicality of a **high wheel**, designed to provide **stability** and **comfort** on all urban routes.

Compact, quiet, and **fully electric**, it is the ideal choice for **professional delivery** and for those seeking a **versatile, reliable,** and **sustainable vehicle for everyday mobility**.



DESIGN

Front



Side view



Back



PERFORMANCE

L1e

45 Km/h
Max speed

148 Nm
Max torque

3.0 kW
Rated power

3.3 kW
Max power

3 Riding modes
25 Km/h - 35 Km/h
45 Km/h

L3e

80 Km/h (L3e)
Max speed

148 Nm
Max torque

4.0 kW
Rated power

5.1 kW
Max power

3 Riding modes
45 Km/h - 65 Km/h
80 Km/h



Performance that make a difference

The **VS2 CITI** is available in two versions: **L1e (50cc)** with a top speed of **45 km/h**, and **L3e (125cc)** reaching up to **80 km/h**, tailored for every urban mobility need. Its electric motor delivers a **nominal power output of 3.0 kW (L1e) and 4.0 kW (L3e)**, with **peak power of 3.3 kW (L1e) and 5.1 kW (L3e)** respectively. With **148 Nm of maximum torque**, it ensures smooth and responsive acceleration in all conditions.

Equipped with the advanced **F.O.C. 3.0 controller**, the system boosts power delivery by **16%**, enhancing both efficiency and performance. The **3 riding modes** allow for optimal adaptability, making the **VS2 CITI** the smart choice for **professional delivery and modern urban commuting**.

FOC 3.0 control unit



High power motor



BATTERY

30 Min - 0% to 80% (Optional)
Super fast charger 6.6kW

1.5 Hours (Optional)
Fast charging time

3.5 Hours (Standard)
Charging time

107 Km* (L3e - 2 batteries)
Range (WMTC Stage 3*)

74v 30Ah NCM
Battery

High performance batteries for maximum autonomy

The **VS2 CITI** comes with **one or two removable 74V/30Ah batteries**, easily re-chargeable using a standard household socket. With the dual-battery setup, it offers a range of up to **127 km** in the **L1 version** and **107 km** in the **L3e version**, making it an excellent choice for urban commuting and professional delivery use.


Charging times vary based on the charger: **3.5 hours** with the **standard 74V10A charger**, **1.5 hours** with the **optional fast 74V20A charger**, and just **30 minutes (0-80%)** with the **6.6 kW Super Fast Charger**. The batteries are equipped with a **CAN BUS communication system** for intelligent monitoring and enhanced safety.



Battery



Chargers

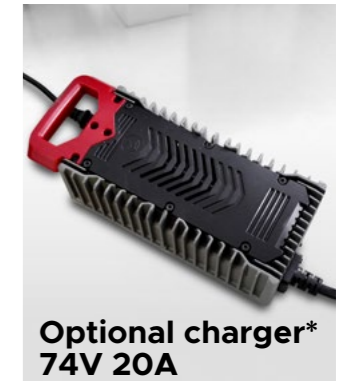

Super fast charger 6.6 kW



CYCLING

Agility and power on every route

Thanks to its advanced electric motor and high torque, the **VS2 CITI** tackles inclines of up to **14°** with ease. This climbing angle makes it ideal for **overcoming urban climbs** and **hilly trails effortlessly**, providing a smooth and stable ride.

14° Steep inclines
Climbing Angle



Hydraulic damping suspensions

The advanced suspension system ensures **optimal comfort** and **control**, adapting seamlessly to **any terrain**. Ride smoothly in every situation.

Front suspension diameter $\varnothing 31\text{mm}$



Rear suspension diameter $\varnothing 32\text{mm}$



SAFETY



Rear disc brake Ø220mm

High-performance **CBS**, ensuring maximum **safety and control in all braking conditions**.



Front disc brake Ø240mm

High-performance **CBS**, powerful front calipers.



High grip tyre

The tires have a **high-density texture**, which provides **strong ground grip** and **high safety**. In addition, the high wheels ensure great stability **Fr. 90/80-16 | Rr. 90/90-14**.



Steady & side stand

Advanced support system that includes a **center stand** and a **side stand**, designed to ensure maximum stability in any situation. The **center stand** provides secure support during loading and unloading, while the **side stands** ensure quick and convenient stopping, even on uneven surfaces.

TECHNOLOGY



Front LED

Equipped with a powerful **LED** front headlamp designed to provide **maximum visibility** in all lighting conditions. The front headlamp **Lighting class D** provides powerful illumination with an **intensity** of **40.000 cd**.



Rear LED

Rear LED designed with a modern and innovative line that hugs the tail. High brightness in any road conditions.



LCD

Clear and intuitive **LCD display** designed to provide the rider with all essential information in real time. Speed, battery level, remaining range and riding mode are always clearly visible, even in bright light.



USB + Type C

Dual **USB** and **Type C** charging ports, designed to provide maximum convenience during deliveries. This equipment allows smartphones, **GPS** devices or other electronic accessories to be charged directly from the vehicle, keeping everything operational at all times.

ERGONOMICS



Ergonomics designed for comfort and efficiency

The **VS2 CITI** has been carefully engineered with a focus on **ergonomics**, ensuring maximum comfort both while riding and during daily operations. Its seat height, frame geometry, and overall layout are designed to make **loading and unloading effortless, without straining the back or compromising posture**. Every detail is optimized to provide a smooth, efficient, and safe experience, even under the demanding conditions of professional urban delivery.

Extra comfort



Super grip



The windshield in the photograph is an extra optional

TECHNICAL INFORMATION



Attention: The photos and technical information contained in this catalog may refer to prototypes subject to changes during production and are for purely illustrative and reference purposes, therefore they are not binding for Vmoto International. Vmoto cannot be held responsible for any printing and/or translation errors. This catalog is transnational and therefore some products may not be available and/or their characteristics may vary according to local laws. Not all colors and versions are available in every country. Vmoto reserves the right to make changes and improvements to any product without prior notice or to make such changes to products already sold. Further characteristics of the products are contained in the relevant user manuals. The products represented are not final versions and are therefore subject to significant changes at the discretion of Vmoto without notice. The photographs published in this catalog show only professional drivers in controlled road conditions. Do not try to imitate this driving behavior as it could be dangerous for you or other people on the road. This catalogue, including, but not limited to, trademarks, logos, texts, images, graphics and table of contents, constitutes the intellectual property of Vmoto, or in any case Vmoto has the right to reproduce it; Any total or partial reproduction, modification or other use of the catalog or its contents is prohibited, including publication on the Internet without the prior written consent of Vmoto. Actual battery consumption may vary based on many factors, including, but not limited to, riding style, maintenance performed, weather conditions, surface characteristics, tire pressure, load, rider weight and the passenger, the accessories. Curb weights are considered with all operating fluids, standard equipment and battery. For more information visit www.vmoto.com.

VS2
CITY



Homologation	L1e-B / L3e-A1 (comparable to a 50cc / 125cc.)	LxWxH	1940 mm*730 mm*1080 mm
Rated power	L1e 3.0 kW L3e 4.0 kW	Wheelbase	1330 mm
Max power	L1e 3.3 kW L3e 5.1 kW	Ground clearance	130 mm
Battery model 	NCM lithium battery	Seat height	770 mm
Battery capacity 	74 V/30 Ah x 1 or 2 PCS	Rims	Fr. 2.15-16 Rr. 2.5-14
Charging time 	Standard 3.5 h x PCS Optional 1.5 h x PCS Optional 30 min 0% to 80% x PCS	Tyres	Fr. 90/80-16 Rr. 90/90-14
Charging power 	Standard 74V10A Optional 74V20A Optional 6.6 kW	Suspension	Hydraulic damping system
Range* 	L1e 127 Km L3e 107 Km	Weight	92 kg (without battery)
Max speed	L1e 45 Km/h L3e 80 Km/h	Brakes	CBS
Climbing angle	14°	Colours	White (Customizable)

*WMTC Stage 3

Compatible with the EMS system



**ELECTRIFY
YOUR WORLD**

vmoto.com